




SURFACE MOUNT CRYSTAL

• HCX-6SB Series

6.0X3.5X1.0 mm

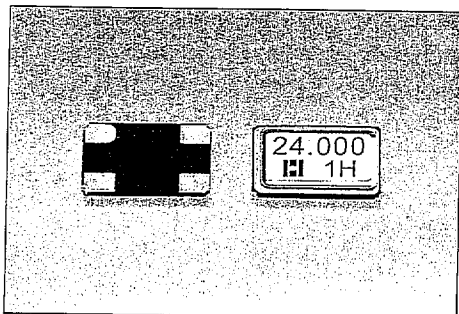

The 6SB crystal is an ultra miniature package with size of 6.0×3.5×1.0mm. With its ceramic Base and metal cover it provides the durability and reliability necessary for strenuous process like infrared and vapor phase reflow.

FEATURES

- Ultra-miniature size
- Fundamental till 40MHz
- Wide Frequency Range
- Seam sealing
- Ceramic package
- Emboss taping
- Reflow soldering

Electrical Specifications



Parameter	Symbol	Condition	Min	Typ	Max	Units
Frequency Range	Fo		10.000		80.000	MHz
Frequency Tolerance	$\Delta F / F_o$	AT 25°C	± 10	± 30	± 50	ppm
Temperature Stability	Tc	REF TO 25°C	± 10	± 30	± 50	ppm
Operating Temperature Range	Topr		-10*		+60*	°C
Storage Temperature Range	Tstg		-40		+85	°C
Shunt Capacitance	Co				7	pF
Load Capacitance	CL	Customer specified	10		Series	pF
Insulator Resistance	Ir	100Vdc	500			MΩ
Drive Level	DL			10	100	μW
Aging	Fa	AT 25°C, per year	-5.0		+5.0	ppm

*Operating temperature range: -20°C to +70°C option


Equivalent Series Resistance(ESR) and Mode of Vibration(Mode)

Frequency Range	Max ESR (Ω)	Mode
10.000MHz to 10.999MHz	100	Fundamental
11.000MHz to 11.999MHz	80	Fundamental
12.000MHz to 15.999MHz	60	Fundamental
16.000MHz to 39.999MHz	40	Fundamental
40.000MHz to 80.000MHz	70	3 rd Overtone

Mechanical Dimensions(mm)




Top View



Note) Pin#2 and #4 are connected through cover, in case connected to GND, frequency might be drifted.

Recommended Solder Pattern



TAIWAN:

HOSONIC ELECTRONIC CO., LTD.
23-1 LANE 84, CHUN YING ST. SHULIN CHEN.
TAIPEI 23804, TAIWAN
WEB SITE: <http://www.hosonic.com.tw>

☎: 886-2-86875200
☎: 886-2-26816456
✉: david@hosonic.com.tw

CHINA:

HANGZHOU HOSONIC ELECTRONIC CO., LTD.
NO.122 LIANGBO ROAD, LIANGZHU TOWN.
YUHANG DISTRICT, HANGZHOU, ZHEJIANG, CHINA
WEB SITE: <http://www.hosonic.com.cn>

☎: (86)-571-88778189
☎: (86)-571-88778857
✉: market@hosonic.com.cn

Specifications are subject to change without notice